

2" ACCESS HOLES IN


REAR OF CABINET

- NOTES: 1. USE 16 GAUGE STEEL FOR CABINET.
  - 2. THE TOP SHELF SHALL SLIDE IN OR OUT WITH THE TOP DOOR OPEN.
  - 3. ALL HINGES AND HASPS WILL BE WELDED TO THE CABINET.
  - 4. ALL EDGES SHALL BE GROUND SMOOTH.
  - 5. TWO (2" DIA.) ACCESS HOLES WILL BE REQUIRED FOR EACH SHELF.
  - 6. CABINET SHALL BE PAINTED WITH TWO COATS OF FLAT PAINT.
  - 7. 2 EACH MATCHING KEY PADLOCKS, WITH 3 KEYS PROVIDED, MASTER MODEL 3 T OR EQUIVALENT.
  - 8. 4 EACH PLAIN STEEL, NON-REMOVABLE PIN, NO HOLE 4"X4" SQUARE CORNER HINGES TO BE WELDED ON.
  - 9. 2 EACH EXTRA HEAVY, PLAIN STEEL, FIXED STAPLE, NO HOLE, 71/4" HASPS TO BE WELDED ON.
  - 10. COST TO BE INCLUDED IN BID PRICE FOR ENGINEER'S FEILD OFFICE OF THE TYPE SPECIFIED.


FLAT STOCK DIMENSIONS VARY DEPENDING ON TYPE OF ROLLER ASSEMBLY.

LOCKABLE COMPUTER CABINET

670-1



- FAP ROUTE 653 (ROUTE 18 COUPLE)
- •• SECTION (7)R, RS-2; (8)R, RS-1

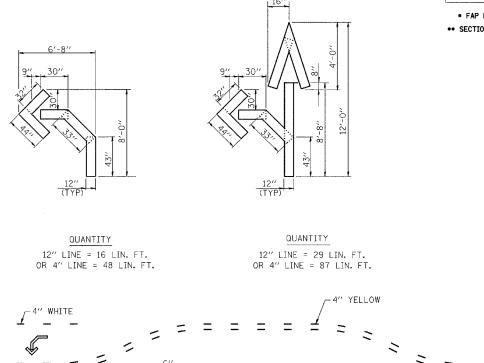

SHORT-TERM PAVEMENT MARKING FOR MEDIANS AND ARROWS

24" SPACE 12" WHITE 6" WHITE (TYP.)

TYPICAL SPACING DETAIL FOR CROSSWALKS AND STOP BARS

780-3

703-1